

Inlet Elements basic

Amab art nr: 8233003176

TE-00-__-

RE 18300-01

Edition: 02.2016

Replaces: 07.2012



Description

The inlet elements have threaded ports and connect the external P and T lines to the P and T channels of the ED Directional Valve Elements.

They include a Test Point port (M) for pressure gauge connection.

Port sizes can be G 3/8, G 1/2 or SAE 8 (3/4 16 UNF).

Material: the body can be made of Black Anodized Aluminium (AL), or of Yellow Zinc plated (Cr+3) Cast Iron (CI).

Technical data

General			
Inlet Element Type		AL Version	CI Version
TE-00-02-00	kg (lbs)	0.33 (0.72)	0.82 (1.81)
TE-00-03-00	kg (lbs)	0.53 (1.16)	1.35 (2.88)
TE-00-56-00	kg (lbs)	0.53 (1.16)	1.35 (2.88)
Ambient Temperature	°C (°F)	-20....+50 (-4....+122) (NBR seals)	
Hydraulic			
Maximum pressure for aluminium version (AL)	bar (psi)	250 (3625)	
Maximum pressure for Cast Iron version (CI)	bar (psi)	310 (4500)	
Maximum inlet flow	l/min (gpm)	50 (13.2)	
Hydraulic fluid		Mineral oil based hydraulic fluids HL (DIN 51524 part 1).	
General properties: it must have physical lubricating and chemical properties suitable for use in hydraulic systems such as, for example:		Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.	
Fluid Temperature	°C (°F)	-20....+80 (-4....+176) (NBR)	
Permissible degree of fluid contamination		ISO 4572: $\beta_{x \geq 75} X = 12 \dots 15$ ISO 4406: class 20/18/15 NAS 1638: class 9	
Viscosity range	mm ² /s	5....420	

Note

For applications with different specifications consult us

Ordering details

01	02	03	04
TE	-	00	-

Family

01	Inlet Elements	TE
----	----------------	-----------

Configuration

02	Basic	00
----	-------	-----------


Ports

03	G 3/8 DIN 3852	02
	G 1/2 DIN 3852	03
	3/4-16 UNF-2B (SAE8)	56


Material

04	Cast Iron	CI
	Aluminium	AL

Symbol

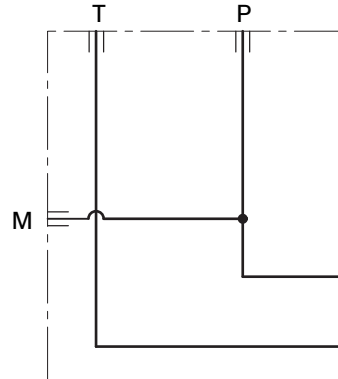

External dimensions and fittings

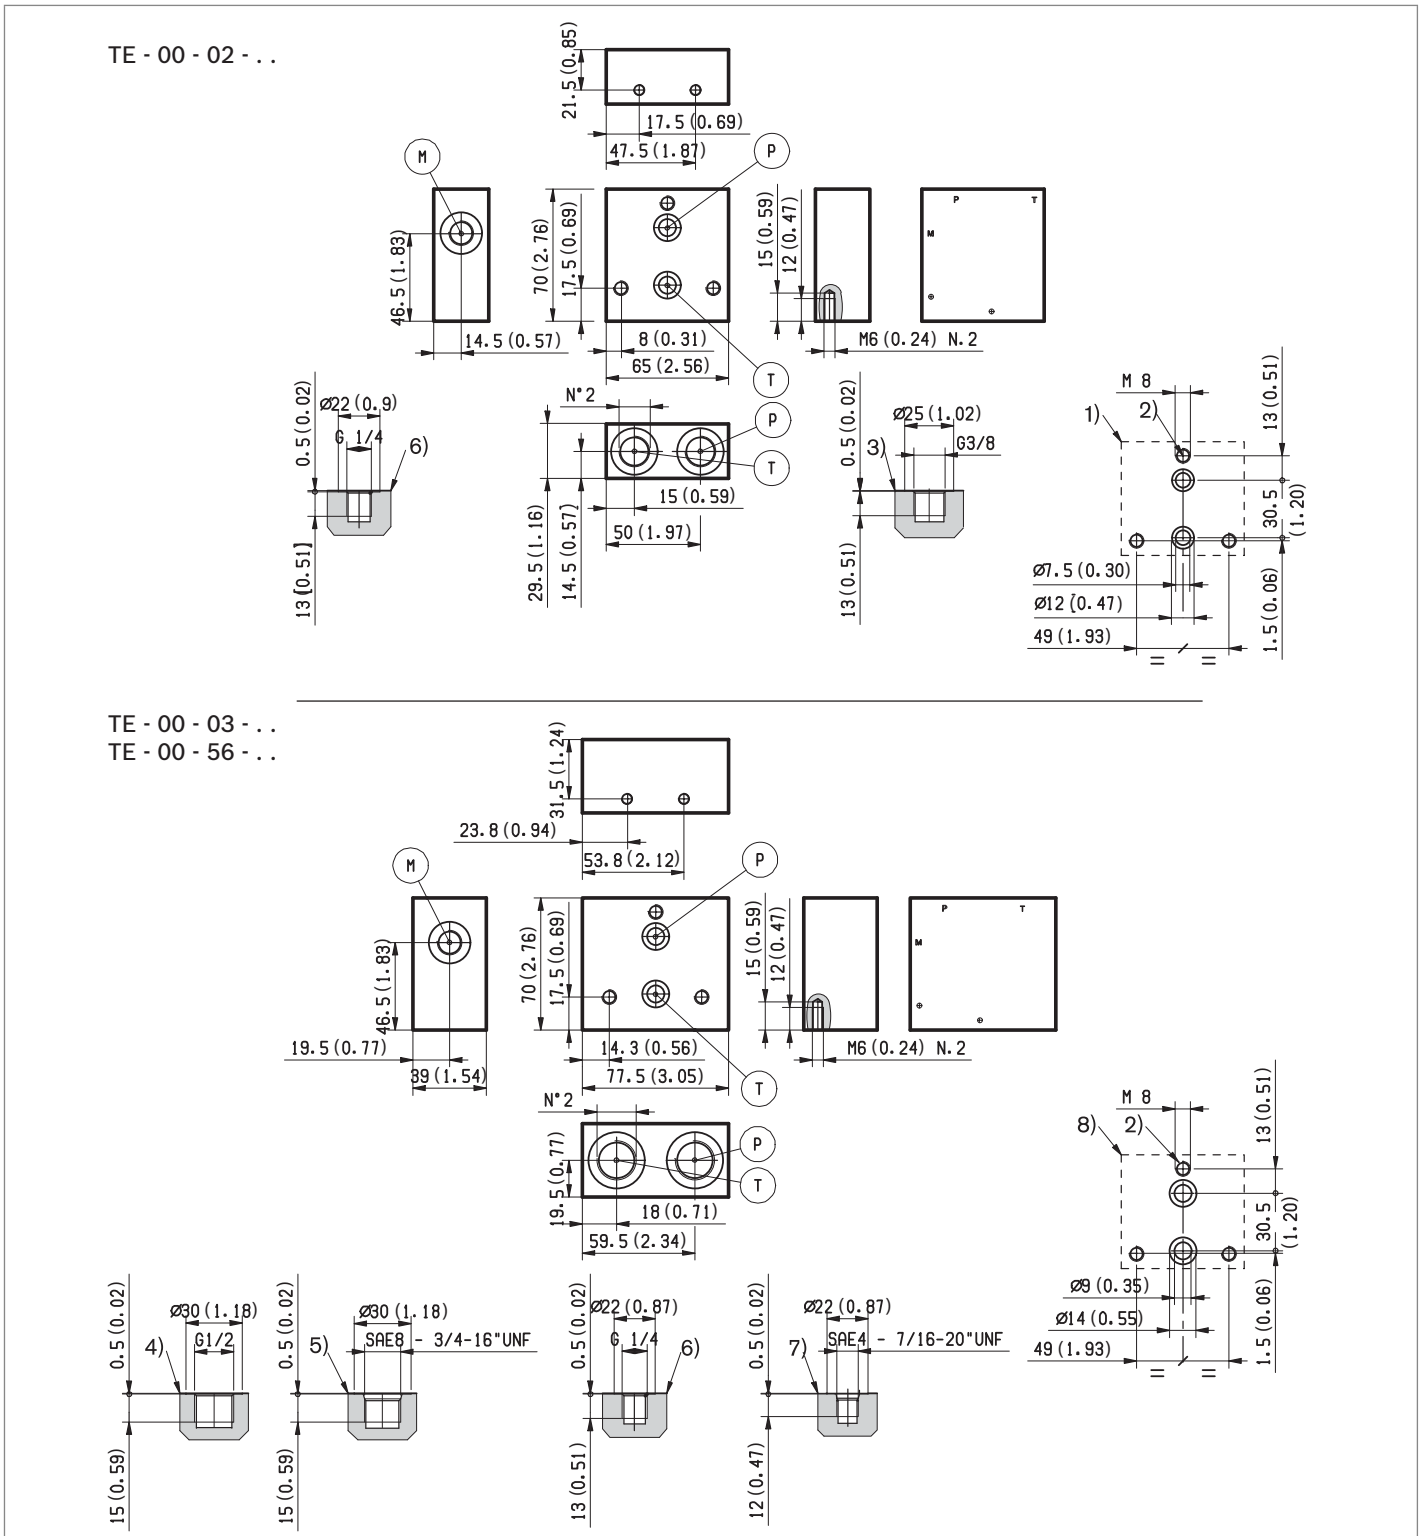

- 1 Flange details for interfacing with the ED Directional Valve Elements (Version TE-00-02...).
- 2 For tie rod and tightening torque information see data sheet RE 18301-90.
- 3 Hydraulic Ports P-T, for Inlet Elements TE-00-02..
- 4 Hydraulic Ports P-T, for Inlet Modules TE-00-03..

- 5 Hydraulic Ports P-T, for Inlet Elements TE-00-56..
- 6 Test Point port (M), for Inlet Elements TE-00-02.. and TE-00-03..
- 7 Test Point port (M), for Inlet Elements TE-00-56..
- 8 Flange details for interfacing with the ED Directional Valve Elements (Version TE-00-03... and TE-00-56...).

Bosch Rexroth Oil Control S.p.A.

Oleodinamica LC Division
Via Artigianale Sedrio, 12
42030 Vezzano sul Crostolo
Reggio Emilia - Italy
Tel. +39 0522 601 801
Fax +39 0522 606 226 / 601 802
compact-hydraulics-cdv@boschrexroth.com
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.
Subject to change.