

## 3/2 ways/positions flow diverters L700... (VS70A)

**RE 18302-14**

Edition: 11.2016



Size 4

Series 00

Maximum operating pressure 310 bar (4500 psi)

Maximum flow 20 l/min (5.3 gpm)

Ports G 1/4

**General specifications**

- 3 way 2 position valve.
- Directional spool valve with direct solenoid control.
- Hydraulic / pneumatic pilot , or manual push and twist control available as option.
- Control spool operated by solenoid, with easily removable coil fastened by a ring nut.
- Wet pin tube for DC coil, with push rod for mechanical override in case of voltage shortage.
- Unrestricted 360° orientation of DC coil.
- Control spool held in normal position by return spring.
- Optional manual override (push-button or screw type).
- Connectors available: DIN 43650 – ISO 4400, AMP Junior, DT04-2P (Deutsch), Free leads.

**Contents**

Ordering details	2
Symbols	2
Functional description	3
Technical data	3
Characteristic curves	5
External dimensions and fittings	6
Electric connection	7

## Ordering details

01	02	03	04	05	06	07	08
L	7	00	2				0

### Family

01	Compact directional valve	L
----	---------------------------	---

### Type

02	Flow diverters	7
----	----------------	---

### Ports

03	G 1/4 DIN 3852	2
----	----------------	---

### Control type

04	Solenoid (coil D36) without manual override	A0
	Solenoid (coil D36) with push-button type manual override	AP
	Solenoid (coil D36) with screw type manual override	AF
	Hydraulic / pneumatic control <sup>1)</sup>	P1

### Spool variants

05	Transitory position closed	3A
	Transitory position open	3N

### Drain type

06	Internal drain	I
	External drain	E

### Voltage supply

		31	07	04	03	01	00
07	Without coil	-	-	-	-	-	● 00
	12 V DC	●	●	●	●	●	OB
	24 V DC	●	●	●	●	●	OC
	48 V DC	-	●	●	●	●	OD
	96 V DC	-	-	-	-	●	OU
	205 V DC	-	-	-	-	●	AH


### Electric connections

08	Without coils	00
	With coils, without mating connector DIN EN 175301-803 <sup>2)</sup>	01
	With coils, with bi-directional diode, without mating connector vertical Amp-Junior	03
	With coils, with bi-directional diode, without mating connector horizontal Amp-Junior	04
	With coils, with bi-directional diode, without mating connector DT04-2P	07
	With coils and bipolar sheathed lead 300mm (11,8 in) long	31


● = Available    - = Not available

## Symbols


### Drain type I



### Drain type E




### Spool variants

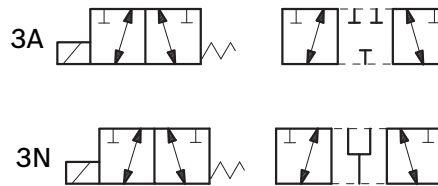

- Minimum pressure 4 bar (58psi) with external drain (E), maximum pressure 200 bar (2901psi). With internal drain (I), at the minimum pressure (4 bar - 58psi), add the working pressure with ratio of 6,5:1. Example: With working pressure 100 bar (1450psi), minimum pilot pressure is 19.38 bar (281psi)  $((100:6,5) + 4 \text{ bar (58psi)})$ .
- For connectors ordering code see data sheet RE 18325-90.

## Functional description

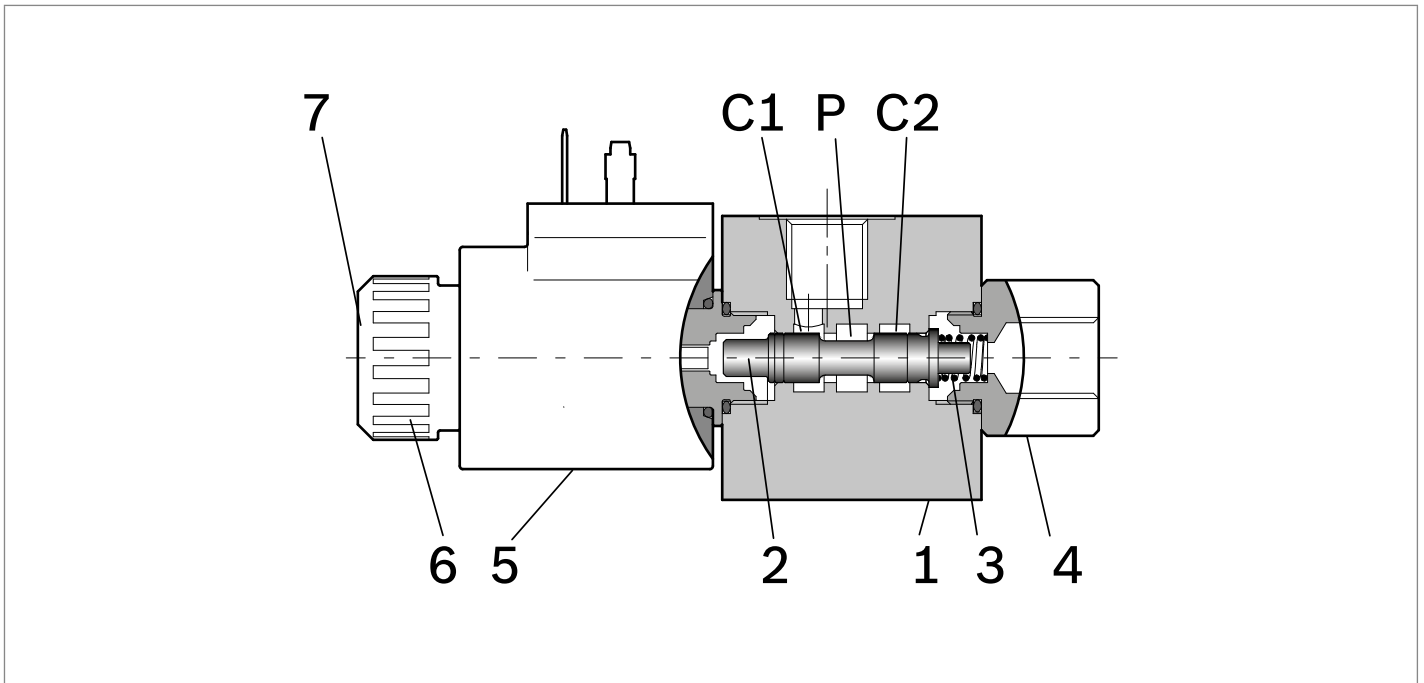

A valve basically consists of a housing (1), a control spool (2), a return spring (3) and a solenoid (5). It is designed to select which one of two circuits (C1 or C2) is to be supplied with the oil delivered from one single hose (P): with spool in position "0", when the solenoid is de-energized, the flow goes from P to C1, with spool in position "1", when the solenoid is energized the flow goes from P to C2. With the coil de-energized, the return spring (3) pushes back

the spool (2) and holds it in position "0".

The coil (5) is fastened to the tube by the ring nut (6). The manual override (7) allows to shift the spool (2) also in case of voltage shortage.

An external drain (4), to be connected to tank, ensures shifting operations also at higher working pressure.

Hydraulic / pneumatic pilot control for spool shifting is available upon request.

## Technical data

General		
Valve weight	kg (lbs)	0.89 (1.960)
Ambient Temperature	°C (°F)	-30...+90 (-22...+194) (NBR seals)
Hydraulic		
Maximum pressure with external drain ("E" type)	bar (psi)	310 (4500)
Maximum pressure with internal drain ("I" type)	bar (psi)	250 (3625)
Maximum flow	l/min (gpm)	20 (5.3)
Hydraulic fluid		
General properties: it must have physical lubricating and chemical properties suitable for use in hydraulic systems such as, for example:		Mineral oil based hydraulic fluids HL (DIN 51524 part 1). Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.
Fluid Temperature	°C (°F)	-30...+100 (-22...+212) (NBR seals)
Permissible degree of fluid contamination		ISO 4572: $\beta_x \geq 75$ X = 12...15 ISO 4406: class 20/18/15 NAS 1638: class 9
Viscosity range	mm <sup>2</sup> /s	5...420
Internal leakage with 100 bar (1450 psi) secondary pressure at C	cc/min (in <sup>3</sup> /min)	min.7 (0.43) max. 15 (0.74)

4 **L700... (VS70A)** | 3/2 ways/positions flow diverters  
 Technical data

<b>Electrical</b>						
Voltage type	DC					
Voltage tolerance against ambient temperature	See characteristic curve page 5					
Duty Cycle	See characteristic curve page 5					
Coil wire temperature not to be exceeded	°C (°F)	180 (356)				
Insulation class	H					
Compliance with	Low Voltage Directive LVD 73/23/EC (2006/95/EC), 2004/108/EC					
Coil weight with connection EN 175301-803	kg (lbs)	0.18 (0.40)				
Voltage	V	12	24	48	96	205
Voltage type		DC	DC	DC	DC	DC
Power consumption	W	20	20	20	20	20
Current (nominal at 20 °C (68 °F))	A	1.62	0.84	0.45	0.21	0.01
Resistance (nominal at 20 °C (68 °F))	Ω	7.4	28.4	106.4	451	2062

**Note**

For applications with different specifications consult us.


Code	Voltage [V]	Connector type	Coil description	Marking	Coil Mat no.
<b>OB 01</b>	12 DC	EN 175301-803 (Ex. DIN 43650)	D3601 12DC	12V DC	R901393412
<b>OB 03</b>	12 DC	AMP JUNIOR	D3603 12DC	12V DC	R901435507
<b>OB 04</b>	12 DC	AMP JUNIOR Horizontal	D3604 12DC	12V DC	R901395031
<b>OB 07</b>	12 DC	DEUTSCH DT 04-2P	D3607 12DC	12V DC	R901394397
<b>OC 01</b>	24 DC	EN 175301-803 (Ex. DIN 43650)	D3601 24DC	24V DC	R901393577
<b>OC 03</b>	24 DC	AMP JUNIOR	D3603 24DC	24V DC	R901435494
<b>OC 04</b>	24 DC	AMP JUNIOR Horizontal	D3604 24DC	24V DC	R901395035
<b>OC 07</b>	24 DC	DEUTSCH DT 04-2P	D3607 24DC	24V DC	R901394399
<b>OD 01</b>	48 DC	EN 175301-803 (Ex. DIN 43650)	D3601 48DC	48V DC	R901394117
<b>OU 01</b>	96 DC	EN 175301-803 (Ex. DIN 43650)	D3601 96DC	96V DC	R901394229
<b>AH 01</b>	205 DC	EN 175301-803 (Ex. DIN 43650)	D3601 205DC	205V DC	R901394231

**Note**

For further versions (i.e. cable single lead) contact factory.

## Characteristic curves


### Pressure drops

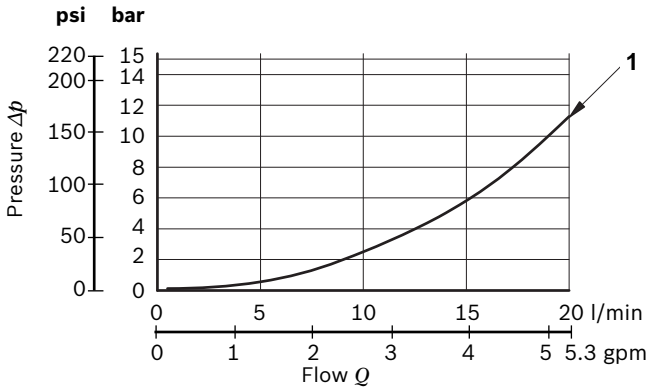

Flow path	Curve no.
P1 > C1	1
P1 > C2	1


Measured with hydraulic fluid ISO-VG32 at 45° ±5 °C (113° ±9 °F); ambient temperature 20 °C (68 °F).

### Performance limits

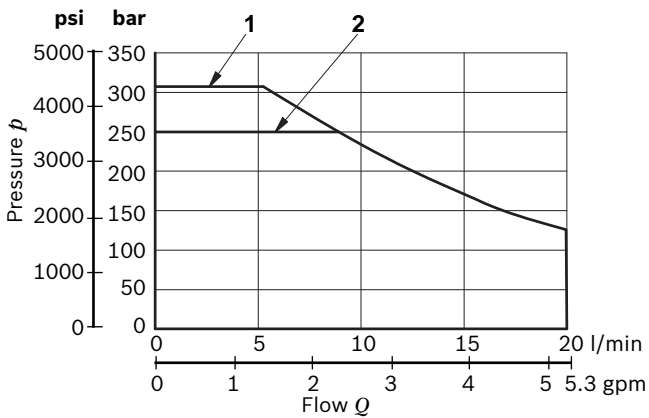

Drain type	Curve No.
External (-E-)	1
Internal (-I-)	2


### Voltage tolerance against ambient temperature; duty cycle 100%

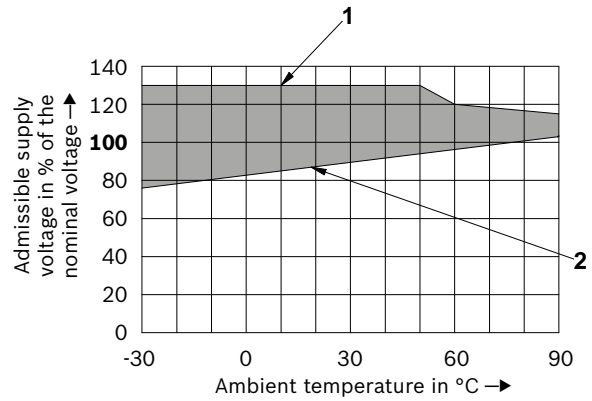

Description	Curve No.
Maximum Voltage	1
Minimum Voltage	2







Admissible supply voltage range

**External dimensions and fittings**

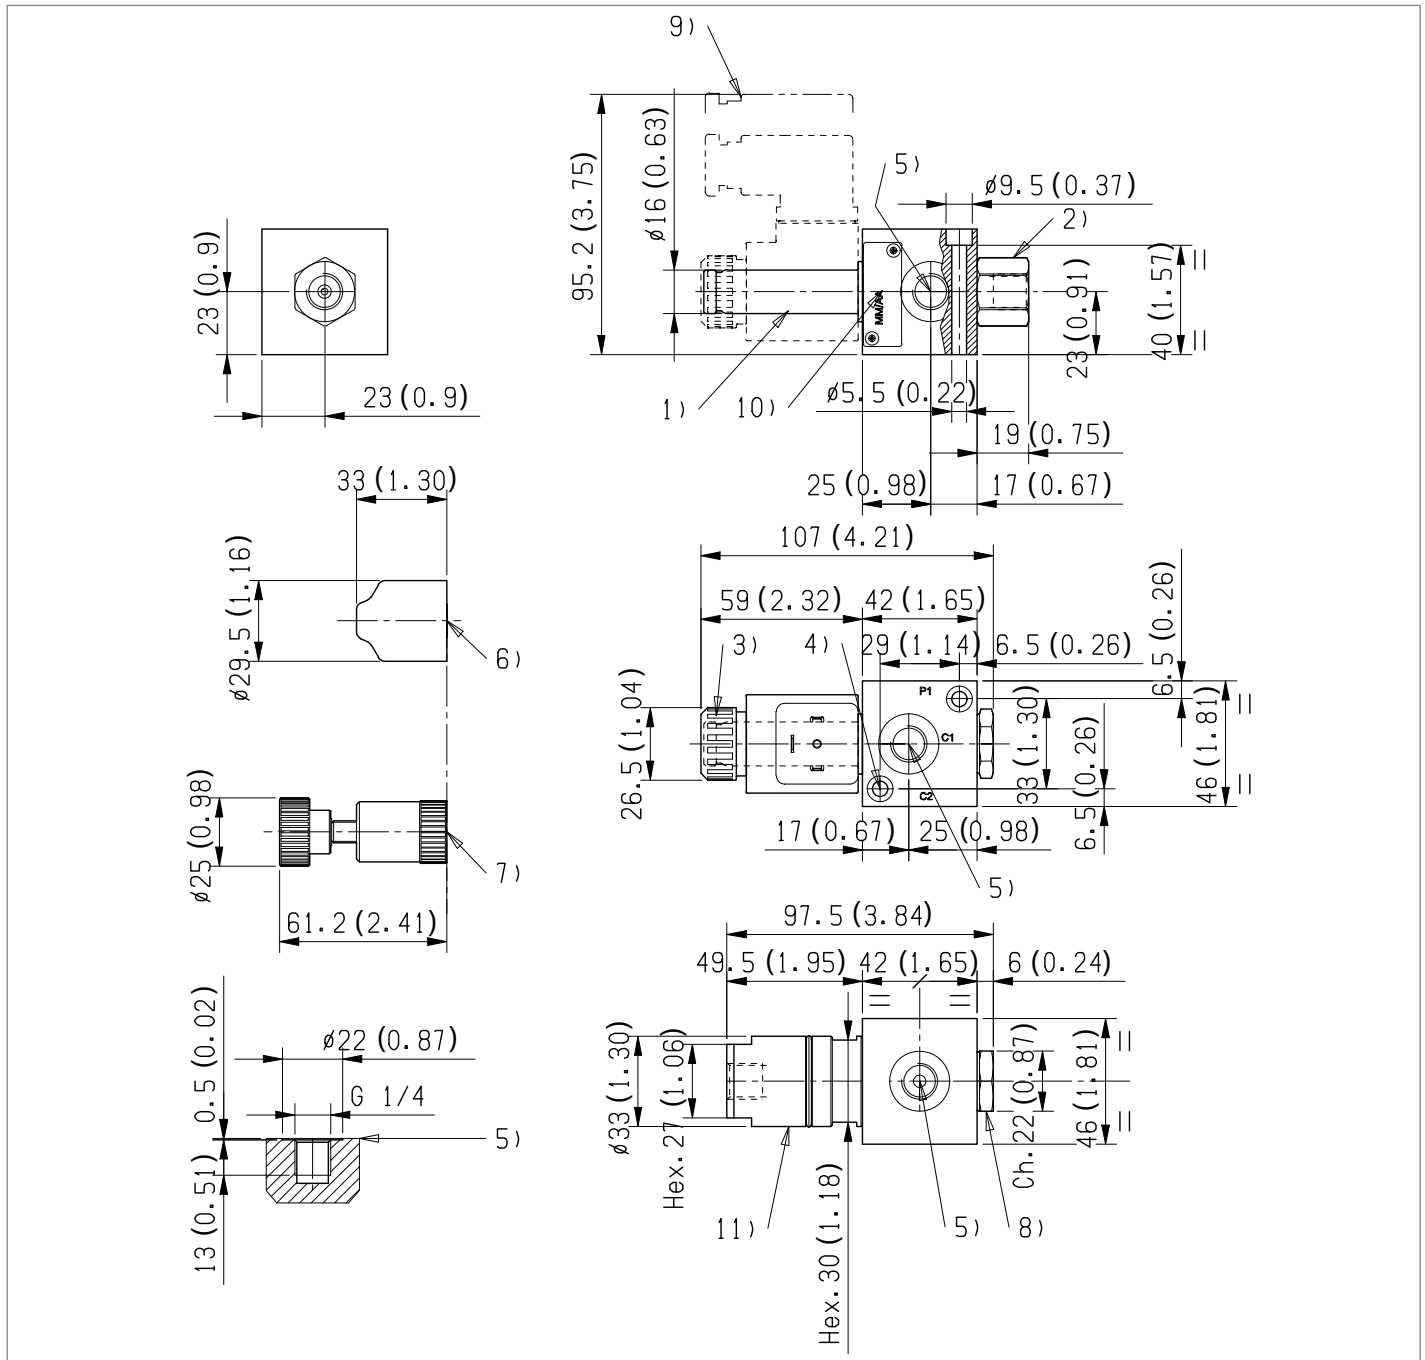

- 1 Solenoid tube  $\varnothing$  16mm (0.63inch).
- 2 Plug for version with external drain.
- 3 Ring nut for coil locking  $\varnothing$  26,5 mm (1,04inch). Torque 3 – 4 Nm (2.2 – 3.0 ft-lb).
- 4 Two through holes for installation. Recommended screws M5 with strength class DIN 8.8. Torque 5-6Nm(3.6-4.4 ft-lb).
- 5 Ports P, C1, C2, External drain, hydraulic/pneumatic pilot port G 1/4.
- 6 Optional push-button type manual override for spool opening: it is pressure stuck to the ring nut for coil locking. Mat no. R930059524.
- 7 Optional screw type manual override for spool opening: it is screwed torque 6-7Nm (4.4-5.2 ft-lb) to the tube as replacement of the coil ring nut. Mat no. R930059561.
- 8 Plug for version with internal drain.
- 9 Minimum clearance needed for connector removal (Ref. RE18325-90 Type1 - R934004344).
- 10 Identification label.
- 11 Hydraulic, or pneumatic pilot connector.

**Electric connection**

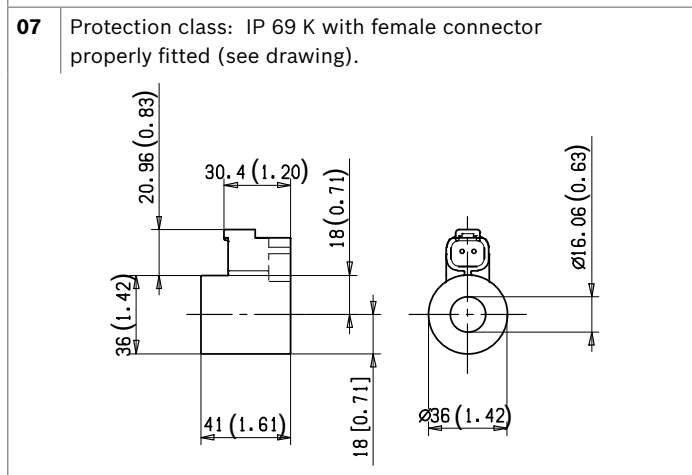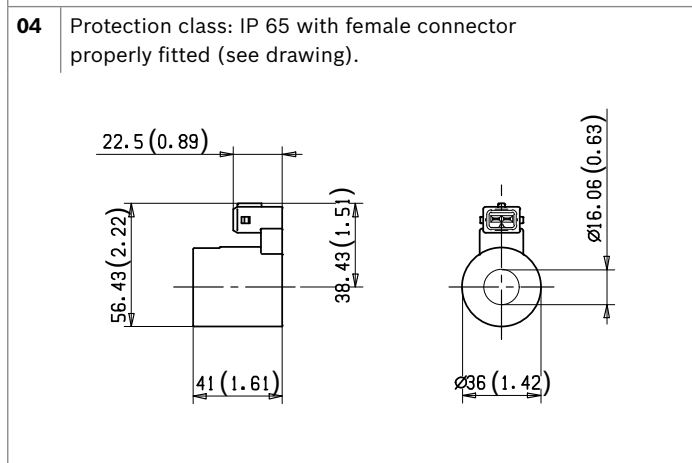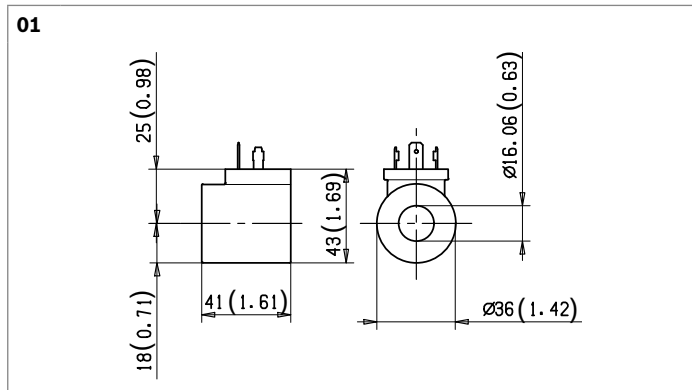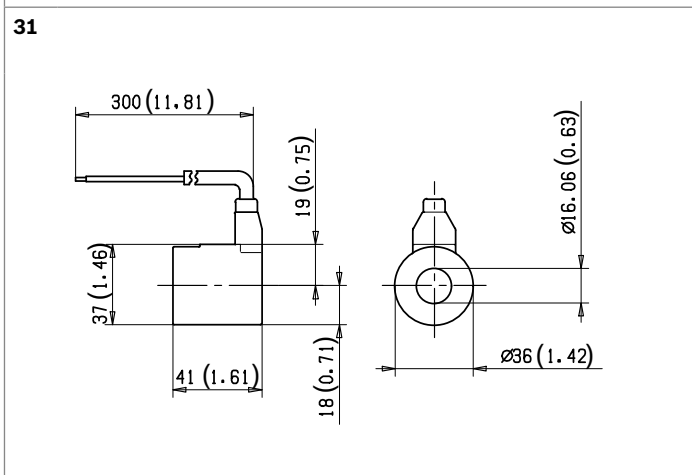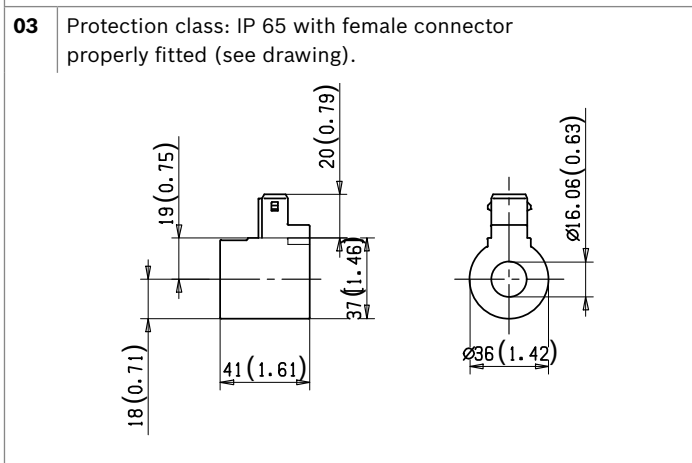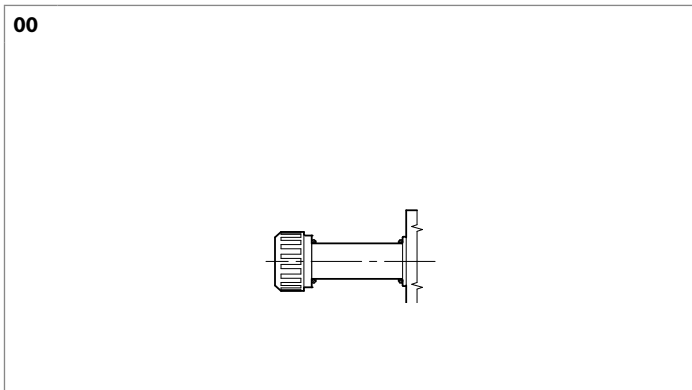

**Bosch Rexroth Oil Control S.p.A.**

Oleodinamica LC Division  
Via Artigianale Sedrio, 12  
42030 Vezzano sul Crostolo  
Reggio Emilia - Italy  
Tel. +39 0522 601 801  
Fax +39 0522 606 226 / 601 802  
compact-hydraulics-cdv@boschrexroth.com  
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.  
Subject to change.